




Sleeve Valve, Plastic Floats & Cords


Full Flow – High or Low Pressure

- ◆ Working Pressure 0 to 1170kPa
- ◆ Handle a wide range of fluids
- ◆ Excellent Chemical Resistance
- ◆ Valve Sizes: – 20mm (¾")
– 25mm (1")
- ◆ Float Sizes: – 115mm (4½")
– 150mm (6")
- ◆ Cord Length: – 400mm

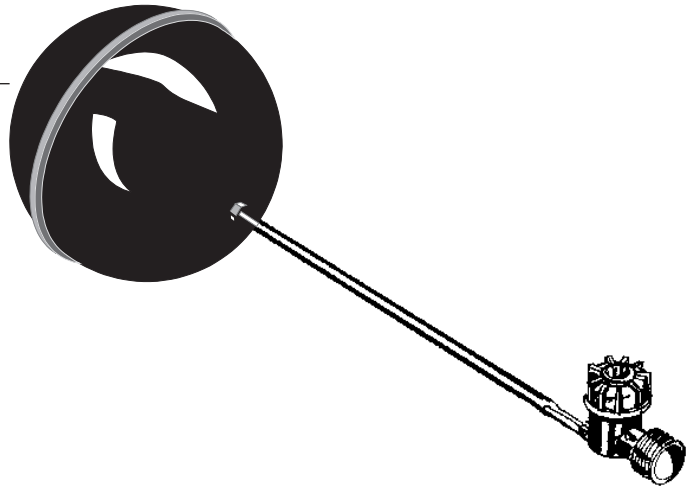


Application

- ◆ Potable water supplies where temperatures can be controlled below 80°C.
- ◆ Not affected by acid or alkaline soils.
- ◆ Unaffected by water containing dilute solution of Chloride and Fluoride.

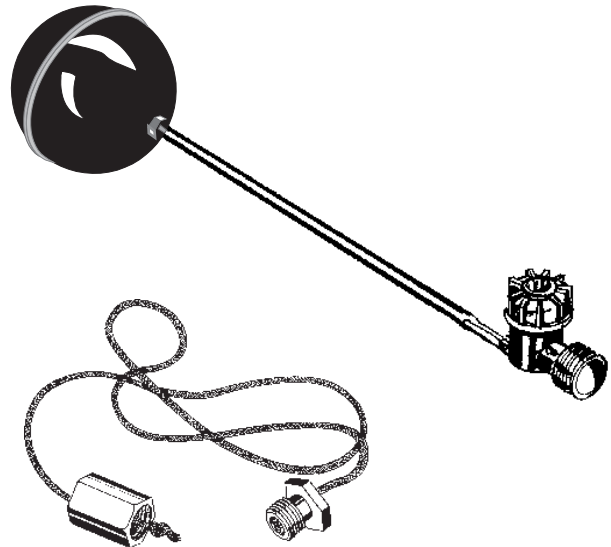

Installation

- ◆ Avoid excess tightening.
- ◆ Use on P.T.F.E. tape seal.
- ◆ The sleeve valve cord is used to install the sleeve valve below water level. This conceals the valve, as well as helping prevent damage from livestock, etc.

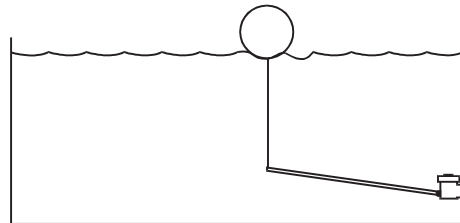

AUSTRALIA – PPI Corporation Pty Ltd (ABN 79 010 656 005)

QLD Sales Office Ph: (07) 3865 2300 Fax: (07) 3857 0058
Townsville Sales Office Ph: (07) 4779 7322 Fax: (07) 4779 2509
NSW Sales Office Ph: (02) 8706 2400 Fax: (02) 8706 2499
VIC Sales Office Ph: (03) 9791 3700 Fax: (03) 9791 3900
SA Sales Office Ph: (08) 8447 2611 Fax: (08) 8447 8117
TAS Sales Office Ph: (03) 6248 5933 Fax: (03) 6248 5988
WA Sales Office Ph: (08) 9212 3200 Fax: (08) 9355 0675
NT Agent Territory Hardware Ph: (08) 8947 1250 Fax: (08) 8984 4461

EXPORT ENQUIRIES Ph: +61 7 3865 3699 Fax: +61 7 3857 0058

NEW ZEALAND – PPI Corporation (NZ) Limited
Christchurch Ph: (03) 313 7956 Fax: (03) 313 5551

EMAIL: sales@ppi.com.au
WEB: www.ppi.com.au

Date: 19th January 2007
Code: ZM/LT1FSVAF0